


▲ 产品规格 Specifications




型号 Model	4R210-06	4R210-08	3R210-06	3R210-08
工作介质 Working Medium	经40微米过滤的空气 Cleaned Air			
接口口径 Port size	进气=排气=出气=G1/8" Air Inter=Air Outlet=Exhaust=G1/8"	进气=出气=G1/4" 排气=G1/8" Air Inter=Air Outlet=G1/4" Exhaust=G1/8"	进气=排气=出气=G1/8" Air Inter=Air Outlet=Exhaust=G1/8"	进气=排气=出气=G1/4" Air Inter=Air Outlet=Exhaust=G1/4"
有效截面积 Effective sectional area (mm ²)	14mm ² (CV=0.78)	16mm ² (CV=0.89)	14mm ² (CV=0.78)	16mm ² (CV=0.89)
工作压力 Working Pressure-Range	0~0.8MPa			
工作温度 Working Temperature Range	0~60℃			
位通数 Position and Port Number	二位五通 5 Ports 2 Positions		二位三通 3 Ports 2 Positions	

▲ 订购码 Order Code

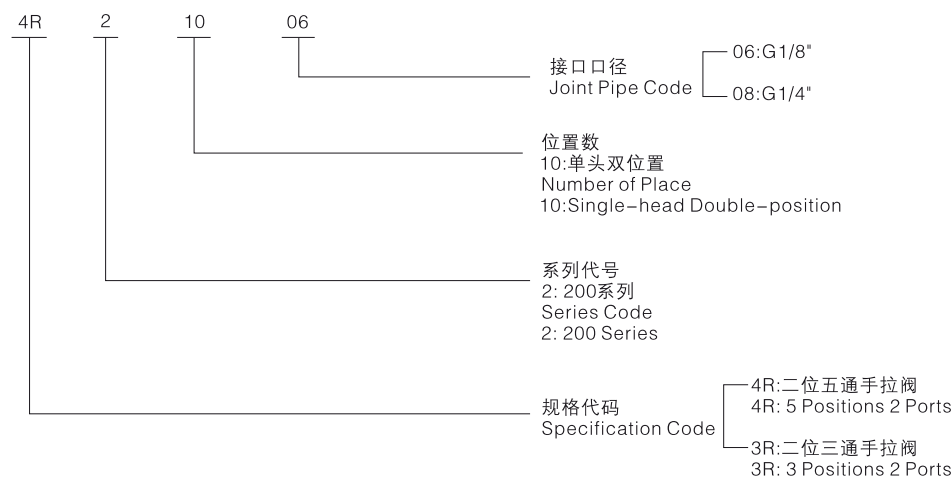

▲ 外形尺寸(毫米)/Overall Dimension(mm)

4R210-08

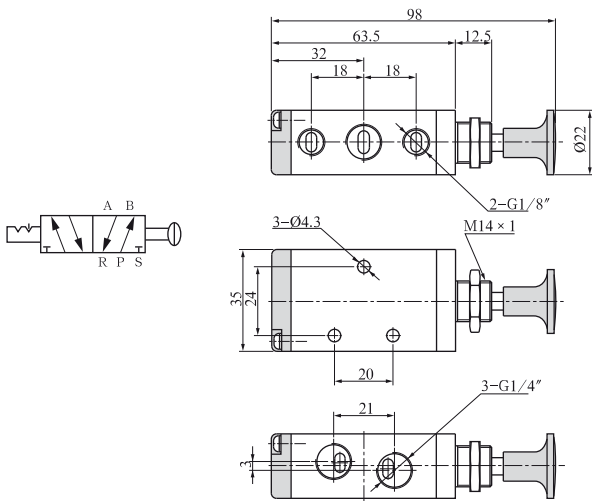

3R210-08

