



▲ 产品规格 Specifications

缸径 ϕ Bore	8	10	12	16	20	25
接管口径 Port size (RcPT)	M5	M5	M5	M5	G1/8	G1/8
杆端螺纹 Rod end thread	M4	M4	M6	M6	M8	M10X1.25
动作型式 Action	双动 Double action cushion					
工作介质 Working fluid	空气 Air					
缓冲形式 Cushion	任意一端不可调 Nonadjustable cushion on any end					
	-	两端可调 Nonadjustable cushion on both ends				
缓冲长度 (PPV) (mm) Cushion length	-	9	12	15	17	
位置感测 Cocation sensing	通过接近传感器 By Proximity sensox					
安装型式 Mounting type	通过附件安装 By essories					
安装位置 Mounting cocation	任意 Option					

B

HYC
HYCD
HYCJ
HYCT
HYC
MBB
QGA(B)
CA1
CS1
DNC
SDA
SDAD
SDAJ
SDAT
SDAW
SDA
CQS
CQ2
ADVU
MAL
MSAL
MALD
MALJ
MAL
MA MAC
MSA
MAD
MAJ
MAR
MA
CJ2

CU
TN
CXS
CXSW
MGP
CJP
CY1B(S)
MH
ZH

▲ 型号选择

DSNU 25 80 PPV A MG

派生型
Derivable
Eype

- MQ: side port
MQ 侧向气接口
- MA 轴向气接口 Ma: Axial port
- MH 轴承盖上带安装法兰
- MH: Bushing with flange

位置感测 Location sensing
A 通过接近传感器 A by proximity sensor

缓冲形式 P
Cushion PPV
P 任意一端具有不可调缓冲器
P: Nonadjustable cushion on any end
PPV 两端具有可调缓冲器
PPV: Adjustable cushion on both ends


行程 (mm) Stroke

缸径 Bore

型号 DSNU: 双作用 Double action
Model ESNU: 单作用 Single action

▲ 外形尺寸(毫米) Overall Dimension(mm)


基本型 Basic

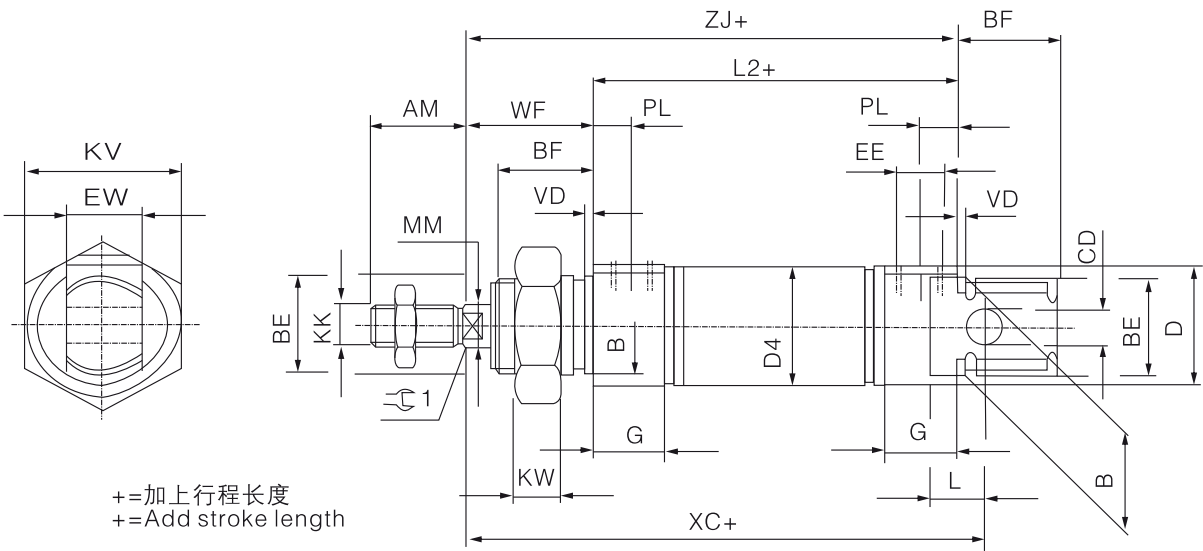


ϕ (mm)	AM	B ϕ h9	BE	BF	CD ϕ	D ϕ E10	ϕ D4	EE	EW	G	KK	KV
8	12	12	M12X1.25	12	4	15	9.3	M5	8	10	M4	19
10							11.3					
12	16	16	M16X1.5	17	6	20	13.3		12		M6	24
16							17.3					
20	20	22	M22X1.5	20	8	27	21.3	G1/8	16	16	M8	32
25	22			22			26.5				M10X1.25	

ϕ (mm)	KW	L	L2	MM ϕ f8	PL	TO	VO	WF	XC ± 1	ZJ	≈ 1
8	6	6	46	4	6	18	2	16	64	62	—
10											
12	8	9	50	6		23		22	75	72	5
16			56						82	78	
20	11	12	68	8	8.2	31		24	95	92	7
25			69.5	10					28	104	97.2

▲ 外形尺寸(毫米) Overall Dimension(mm)

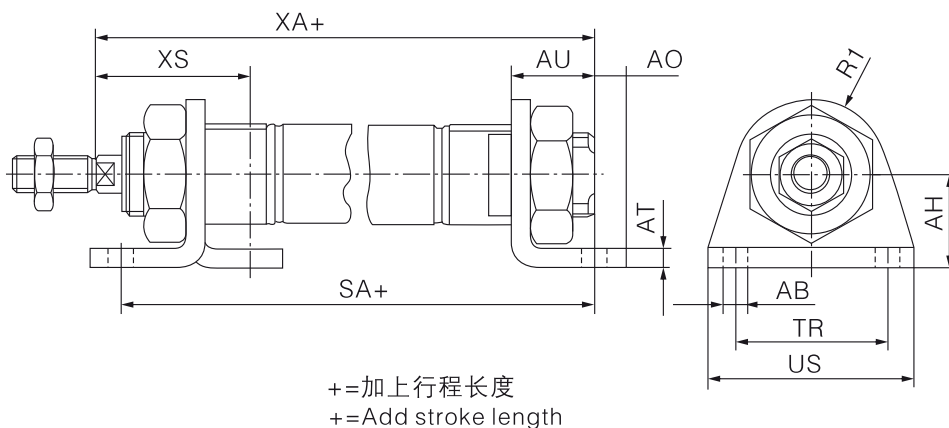

ϕ (mm)	ϕ AB	AH	AO	AT	AU	R1	SA		TR	US	XA		XS	
								−KP				−KP		
8,10	4.5	16	5	3	11	10	68	97	25	35	35	102	24	−
12	5.5	20	6	4	14	13	78	116	32	42	42	124	32	−
16	5.5	20	6	4	14	13	84	122	32	42	42	130	32	−
20	6.6	25	8	5	17	20	102	149	40	54	54	156	36	−
25	6.6	25	8	5	17	20	103.5	151.5	40	54	54	162.5	40	−

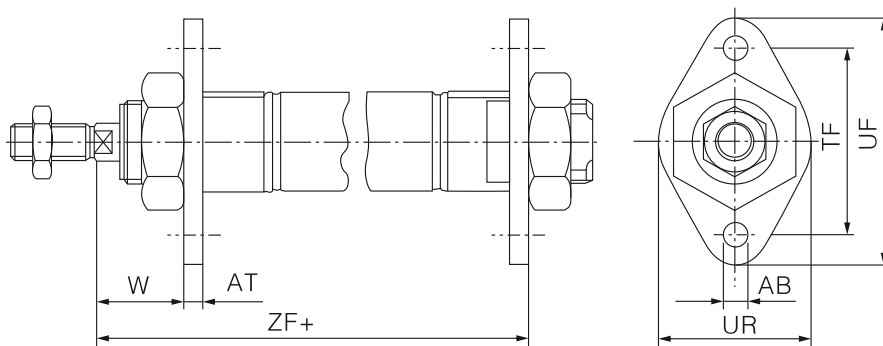

ϕ (mm)	ϕ AB	AT	TF	UF	UR	W	ZF	
								-KP
8,10	4.5	3	30	40	25	13	65	94
12	5.5	4	40	53	30	18	76	114
16	5.5	4	40	53	30	18	82	120
20	6.6	5	50	66	40	19	97	144
25	6.6	5	50	66	40	23	102.5	150.5

B

HYC
HYCD
HYCJ
HYCT
HYC
MBB
QGA(B)
CA1
CS1
DNC
SDA
SDAD
SDAJ
SDAT
SDAW
SDA
CQS
CQ2
ADVU
MAL
MSAL
MALD
MALJ
MAL
MA MAC
MSA
MAD
MAJ
MAR
MA
CJ2
CM2
DSNU
CU
TN
CXs
CXSW
MGP
CJP
CY1B(S)
MH
ZH